

# R300H. R650HS. R1000H. Mains-powered tungsten lights... ... what a clever and bright idea.

They are the ideal companions for all inside shots. Lightweight and compact, these fixtures can be operated on a stand or hand-held.

Thanks to their optimal reflector design, they offer extremely high output and even light distribution. On a stand or as a hand-held light, individually or as a set of three, Sachtler mains-powered lights provide you with flexible and easy lighting, anywhere you might be.

## Reporter 300H.

For use on-camera, hand-held, or on a stand.

Sachtler's Reporter 300H isn't much larger than the Reporter 100H. A complete set gives you three lights, corresponding stands,

umbrellas, diffusers, and filters for illuminating scenes or inter-views.

You can rely on top-notch light distribution, even if you insert 200W or 150W bulbs into your Reporter 300H.



## Reporter 650HS. Perfect for every situation.

The Reporter 650HS's large focussing range with an extremely high degree of illumination both in spot and flood settings is unsurpassed in its class. A filter slot is integrated into the 4-leaf barn door mounts. The plastic casing complies with protective class II. The Sachtler Handle 2 can be used for hand-held operation.


Need to change a bulb? The sliding lock allows you to quickly and easily open the casing - and you don't even need a tool.



A quick release provides for easy, tool-free bulb replacement.

## Reporter 1000H For wide angle illumination

Thanks to its extremely wide angle, even illumination, the Reporter 1000H is suitable for portable and studio applications. This stand-mounted fixture has a focussing range that extends from a 22° spot to a 76° flood. Want to use the Reporter 1000H as a hand-held fixture? As with the Reporter 650HS, you can plug the Sachtler Handle 2 with 16mm spigot into the stand socket

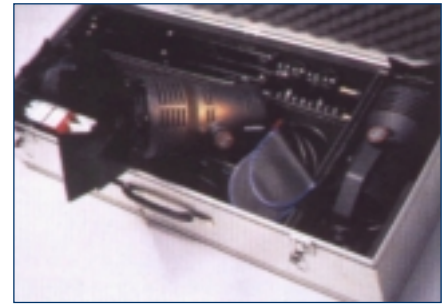

The set contains three R650HS units- outputs surpassing 3x1000W

Reporter 300H,	110V	230V	240V			
Reporter 300HSM						
Code No. With handle	R311H	R322H	R324H			
Code No. With stand mount	R311HSM	R322HSM	R324HSM			
Weight fixture/barn door:	650 g/150 g					
Cable length:	4m					
R300H mount:	In camera accessory shoe, 1/4" threaded hole or with accessories					
R300HSM mount:	Socket 16/1, 16mm					
Socket:	GY6.35					
Bulbs:	Philips VL 300, VL 150, Osram 64514 (110V), Osram 64516 (230V)					
LCL*	30mm					
Light output in Lux with distance in m	2.00	3.00	4.00	5.00	6.00	7.00
Spot 30°	3750	1670	940	600	420	310
Flood 46°	1250	560	310	200	140	100

Reporter 650HSM	110V	230V	240V			
Code No.	R651HS	R652HS	R654HS			
Weight fixture/barn door:	1300 g/260 g					
Cable length:	3.8m					
Stand mount:	Socket 16/2, 16mm					
Socket:	GY9.5					
Bulbs:	ANSI Codes: FRK, FRL, FRM, LIF-Code: CP89					
LCL*	46.5mm (max. 650W)					
Light output in Lux with distance in m	2.00	3.00	4.00	5.00	7.00	10.00
Spot 20°	15630	6940	3910	2500	1280	630
Flood 56°	2810	1250	70	450	230	110

Reporter 1000H	110V	230V	240V			
Code No.	R1001H	R1003H	R1003H			
Weight fixture/barn door:	1850 g/550 g					
Cable length:	3m					
Stand mount:	Socket for 16mm spigot					
Socket:	R7s, L=93mm					
Bulbs:	ANSI Code: DXW (120V), LIF-Code: P2/35 (230V/240V)					
Light output in Lux with distance in m	2.00	3.00	4.00	5.00	6.00	10.00
Spot 22°	12500	5560	3130	2000	1020	500
Flood 76°	2060	920	520	330	170	80